

STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
MOTOR FUEL TAX ADMINISTRATION
HAULING PERMITS SECTION
P.O. DRAWER 7065
DOVER, DELAWARE 19903-7064
302-744-2700
302-739-6299 (fax)

OVERSIZE OVERWEIGHT HAULING PERMIT

POLICY and PROCEDURES MANUAL



December 1999

Revised September 2000

Table of Contents

1. PURPOSE.	3
2. LEGAL AUTHORIZATION.	3
3. LEGAL VEHICLE SIZES & WEIGHTS.	3
A. LENGTH	3
B. WIDTH	4
C. HEIGHT	4
D. WEIGHT	4
4. WHO MUST APPLY FOR PERMITS.	6
5. WHERE TO APPLY	6
A. ELECTRONICALLY:	6
B. IN PERSON:	6
C. BY FAX:	7
D. THIRD PARTY:	7
6. INFORMATION REQUIRED	7
7. RULES OF ISSUANCE	7
8. TYPES OF PERMITS	8
A. SINGLE-TRIP PERMITS	8
B. MULTI-TRIP PERMITS	8
9. PERMIT FEES	9
10. EXTREME EMERGENCY PERMIT	9
11. GOVERNMENT NO CHARGE PERMITS	10
12. SUPERLOADS	10
APPENDIX A – SAMPLE OF STATE OF DELAWARE PERMIT	12
APPENDIX B – COMMON SAFETY STANDARDS	13
APPENDIX C – STATE OF DELAWARE ESCORT REQUIREMENTS	20

1. Purpose.

The purpose of this manual is to state the policy and procedures of the Department of Transportation, Division of Highways, regarding the issuance of Hauling Permits, hereinafter called "permit", for oversized and/or overweight movements.

2. Legal Authorization.

Chapter 45, Section 4504 of Title 21 of the Delaware Code delegates authority to the Delaware Department of Transportation to establish such rules and regulations including the setting of fees as may be needed to comply with the laws of the State of Delaware and the laws of the Federal Government.

As authorized in Chapter 45, Section 4504 of Title 21 of the Delaware Code, local authorities may issue a special permit which may have different requirements from those set forth herein. Every such permit shall be laid only upon highways under the jurisdiction of and for which the maintenance thereof is the sole responsibility of the governing body issuing the permit.

In the establishment of this policy, it is not intended, and no section of this policy shall be so interpreted, as to require the violation of any legal statute, State or Federal.

A permit shall be required for movement on the highways of the State of Delaware when any vehicle, vehicle combination, vehicle and load combination, and/or equipment or machinery being moved under its own power exceeds the dimensional and/or weight limits set forth in Chapter 45, Title 21 of the Delaware Code. The limitations are described below.

3. Legal Vehicle Sizes & Weights.

A. Length

If the overall length of any vehicle or combination of vehicles exceeds the legal length limits contained herein, a permit shall be required.

- (1) Single vehicles, including the load thereon, shall not exceed 40 feet in length including front and rear bumpers, except buses which may have an overall length of up to 45 feet.
- (2) On Interstate and U. S. Routes not otherwise posted:
 - (a) The maximum length of a semitrailer and load shall be 53 feet.
 - (b) The maximum length of a trailer or semi-trailer including load in a truck tractor-semitrailer-trailer combination shall be 29 feet.
- (3) On all other highways:
 - (a) The maximum length of any combination of vehicles shall be 60 feet except as provided below.
 - Tractor and semi-trailer transporting motor vehicles shall be 65 feet exclusive of the overhang of the transported vehicles.
 - Piling and pole trailers and vehicles or combination of vehicles engaged in the transportation of steel beams, pipes, angles, channels and other lengths of steel, or other metals, or other articles impossible of dismemberment shall not exceed 70 feet. When carrying long logs, poles, piling, and etc. a pole trailer shall be required.
 - (b) The limitations as to the length of load shall not apply in the case of a vehicle or combination of vehicles transporting boats commonly known as crew or rowing shells for use in interscholastic or intercollegiate rowing contests provided that such boats shall not exceed 70 feet in length.

- (4) The maximum overhang shall not exceed 6 feet beyond the rear of the vehicle and no load shall be permitted to touch or drag upon the roadway regardless of permissible overhang. No vehicle or combination of vehicles shall carry any load extending more than 3 feet beyond the front thereof.
- (5) Pilings and/or poles or mill logs, or nursery stock, or rowing shells, or steel beams, pipes, angles, channels and other length or steel, or other metal, or other articles impossible of dismemberment shall not extend more than 10 feet beyond the rear of the bed or body of such vehicle.

B. Width

If the overall width of any vehicle or combination of vehicles exceeds 102 inches measured as defined below, a permit shall be required.

On Interstate and U. S. Routes the outside width of 102 inches is exclusive of safety equipment which may extend not more than 3 inches more on each side of the vehicle.

On all other highways, no vehicle including any load thereon shall exceed a total outside width of 102 inches inclusive of safety devices.

C. Height

If the maximum height of any vehicle or combination of vehicles including load thereon exceeds 13 feet 6 inches it shall be necessary to obtain a permit.

D. Weight

A permit is required if the gross weight of vehicle and load or vehicle combination and load exceeds the limits for which the vehicle combination are licensed or exceeds the limits imposed by statute as shown in the following "Table For Maximum Gross Weights".

TABLE FOR MAXIMUM GROSS WEIGHTS

ALL ROADS EXCEPT INTERSTATE

20,000 lbs. per single axle;
 34,000 lbs. per tandem axle;
 2 axle vehicle: 40,000 lbs. maximum;
 3 axle vehicle: 65,000*lbs. maximum;
 4 axle vehicle: 73,280 lbs. maximum;
 5 axle vehicle: 80,000 lbs. maximum

THE INTERSTATE SYSTEM

20,000 lbs. per single axle
 34,000 lbs. per tandem axle
 2 axle vehicle: 40,000 lbs. maximum
 3 axle vehicle: 54,000 lbs. maximum
 4 axle vehicle: 74,000 lbs. maximum
 5 axle vehicle: 80,000 lbs. Maximum
 or the Bridge Formula, whichever is less

* 3 axle vehicle registered for 65,000 lbs. may purchase an annual permit (\$100) to carry up to 70,000 lbs.

Bridge Formula Maximum Gross Weights For The Interstate System

Distance in feet between the extremes of any group of 2 or more consecutive axles	Maximum Load in Pounds Carried on Any Group of 2 or More Consecutive Axles					
	2 axles	3 axles	4 axles	5 axles	6 axles	7 axles
4	34,000					
5	34,000					
6	34,000					
7	34,000					
8 and less	34,000	34,000				
more than 8	38,000	42,000				
9	39,000	42,500				
10	40,000	43,500				
11		44,000				
12		45,000	50,000			
13		45,500	50,500			
14		46,500	51,500			
15		47,000	52,000			
16		48,000	52,500	58,000		
17		48,500	53,500	58,500		
18		49,500	54,000	59,000		
19		50,000	54,500	60,000		
20		51,000	55,500	60,500	66,000	
21		51,500	56,000	61,000	66,500	
22		52,500	56,500	61,500	67,000	
23		53,000	57,500	62,500	68,000	
24		54,000	58,000	63,000	68,500	74,000
25			58,500	63,500	69,000	74,500
26			59,500	64,000	69,500	75,000
27			60,000	65,000	70,000	75,500
28			60,500	65,500	71,500	76,500
29			61,500	66,000	71,500	77,000
30			62,000	66,500	72,000	77,500
31			62,500	67,500	72,500	78,000
32			63,500	68,000	73,000	78,500
33			64,000	68,500	74,000	79,000
34			64,500	69,000	74,500	80,000
35			65,500	70,000	75,000	
36			66,000	70,500	75,500	
37			66,500	71,000	76,000	
38			67,500	71,500	77,000	
39			68,000	72,500	77,500	
40			68,500	73,000	78,000	
41			69,500	73,500	78,500	
42			70,000	74,000	79,000	
43			70,500	75,000	80,000	
44			71,500	75,500		
45			72,000	76,000		
46			72,500	76,500		
47			73,500	77,500		
48			74,000	78,000		
49				78,500		
50				79,000		
51				80,000		

4. Who Must Apply for Permits.

- a. A permit is required for movement on the highways of the State of Delaware when any vehicle and/or load exceeds the limits described above.
- b. All motor vehicles, combination of vehicles, self propelled equipment, and machinery shall be licensed prior to an application being made for a permit.
- c. Implements of husbandry which are being temporarily operated, moved or transported upon State maintained highways except Interstate and U. S. Routes are not required to obtain a hauling permit. A permit is not required on the Interstate and U.S. Routes when the equipment is being used by farmers engaged in their agricultural related practices. A permit is required at all other times.
- d. A permit is not required for any vehicle crossing or entering upon State maintained highways while engaged in construction or maintenance operations, provided such moves are made within the limits of a Federal, State, County, or Municipal Contract.
- e. A permit is not required for Federally defined STAA vehicles on the defined STAA routes. The Federal Register, Volume 55, Number 83, dated Monday, April 30, 1990, page 17952, lists the following roads, as well as the Interstates 95, 495 and 295, as the designated STAA routes in Delaware:
 - U.S. Route 13, from the Maryland State Line, to the I-495 South Interchange in Wilmington.
 - U.S. Route 40, from the Maryland State Line, to I-295, U.S. Route 13, in Wilmington.
 - U.S. Route 113, from the Maryland State Line, to U.S. Route 13, in Dover.
 - U.S. Route 301, from the Maryland State Line, to U.S. Route 40, in Glasgow.
 - Separately, Delaware has designated U.S. Route 202, from U.S. Route 13, to the Pennsylvania State Line; and State Route 1, from I-95, to U.S. 113, in Dover as routes open to STAA vehicles.

5. Where to Apply

A. Electronically:

Application of permits can also be done electronically directly by the permittee. This direct entry process is described in detail in the State of Delaware Oversize Overweight Permit System User's Guide for the On-Line Customer available from the Hauling Permit Office.

B. In Person:

Permits may be obtained by appearing in person at any of the 3 offices which are located in the following State facilities:

Delaware Department of Transportation
Bear Highway Administration Building
Delaware Route 7
Bear, DE

Delaware Department of Transportation
Public Safety Building
303 Transportation Circle
Room 112
Dover, DE

Delaware Department of Transportation
Georgetown Highway Administration Building
US 113
Georgetown, DE

C. By Fax:

Fax applications require that the permittee have a facsimile machine (FAX) in order to receive the validated permit. The permittee must also maintain a funds account with sufficient funds to purchase the requested permit. Details of the purchase by fax are contained in the State of Delaware Oversize Overweight Permit System User's Guide For the Fax Customer available from the Hauling Permit Office.

D. Third Party:

Permits may also be obtained by contacting any one of the several communications redistribution firms authorized by the State to perform such work. The current listing of such firms is available by contacting the Permit Office in Dover, Delaware.

6. Information Required

- a. It is the responsibility of the permittee to supply all information necessary to complete the permit. A sample permit showing all of the required data is attached in Appendix A.
- b. Superloads may require further information as outlined later in this document. A superload is defined as a vehicle and/or load fifteen (15) feet or more in width, fifteen (15) feet or more in height, one hundred twenty (120) feet or more in length, and/or has a gross weight in excess of 120,000 pounds. These moves may require additional information, review, restrictions, and/or fees prior to issuance of the permit. All applications for superload moves should be submitted at least five working days in advance of the requested movement date. Less notice may result in a delay of movement because engineering review can take up to five days. The Department will accept no liability or other claim due to processing delay or the refusal to permit the move at all.
- c. Superloads and moves involving a GVW under the superload classification will be subject to individual axle weight analysis by the DelDOT Bridge Management Section. The Bridge Management Section will automatically review permits with an individual axle weight greater than 28,000 pounds, however, analysis may occur at a lower weight on a case by case basis. Permittee is responsible to effectively distribute a load or reduce the overall weight below this axle limit, as necessary, to lessen the higher live load forces overstressing state structures.

7. Rules of Issuance

- a. Any person making application for a permit shall provide accurate information concerning the granting of the permit. Any permit obtained on the basis of false or misleading data is null and void. Any fee levied for it shall not be transferred or returned.
- b. No person shall violate any of the terms, conditions, restrictions, rules, or regulations published as a part of this policy or stated on the permit. Failure by the applicant to comply with and agree to all provisions stated within this policy and stated on the face of the permit shall render the permit null and void. Such violations may also be the basis for denying future permits.
- c. All permit applications will be considered on an individual basis. The safety devices, rules and regulations required of each move are described in Appendix B, titled, 'Common Safety Standards'. The Department reserves the right to require flagmen, additional signs or escorts, along with any other precautions deemed necessary by the Director of Highway Operations or his authorized representative to insure the safety of the traveling public.
- d. The issuance of a hauling permit by the State in no way guarantees any roadway or structure to be capable of carrying or passing the vehicle or load described. The permit does not supersede any lesser load limit posted on a bridge or highway unless so noted.

- e. The permittee shall assume all responsibility for any damages to road surface, traffic control devices, bridges or other structures and all liability in case of injury to person or property, public or private, that may result from such movement. Liability and property damage insurance in sufficient amounts to cover any and all claims that may arise shall be carried by the permittee, and under the coverage, the State of Delaware shall be saved harmless from any such claim.
- f. Every permit granted shall be electronically generated and shall be issued or validated by a State of Delaware Permit Agent. Each permit shall contain a description of the vehicle and/or load, a complete routing schedule, a statement of fee levied and the name of the authorized officer of the granting authority.
- g. Permits may be granted only for vehicles or trailers complying with Title 21, Chapter 21, of the Delaware Code. Every permit shall be carried in the vehicle to which it refers during the movement it authorizes and it shall be open to inspection by any peace officer. Copies of multi-trip permits issued to utility companies may be carried by their vehicles in lieu of the original. Copies of multi-trip route permits shall be posted at the destination point or the main office of the company. Copies of a ship permit may be carried by the movers of the loads associated with the ship permit.
- h. Permits shall not be issued for a reducible load, with the exception of 3 axle vehicles and ship permits described herein.
- i. Delaware law allows for 3 axle vehicles to carry up to 65,000 lbs. and further, with the obtaining of an annual weight registration fee permit, carry up to 70,000 lbs. These vehicles are legal on all roads in Delaware with the exception of the Interstate where the Bridge Formula prevails. The State of Delaware, under grandfather clauses allows for single trip permits to be issued for these vehicles to run on the Interstate in Delaware up to their registered and/or permitted weight. For 4 axle vehicles the GVW permitted is 73,280 lbs.
- j. Delaware acknowledges being pre-exempted for reasonable access to be in compliance with 23FR658.19. With the exception of the Interstate system, all designated routes have full facilities on route and do not require additional access. On the Interstate system, reasonable access shall be as defined in 23FR658.19 except at those interchanges where no facilities are available and are so signed.

8. Types of Permits

A. Single-trip Permits

Single trip permits shall be issued for single trips from the designated starting point to the designated terminal point. Intermediate terminal stopping points and round trips are not permitted.

B. Multi-trip Permits

Multi-trip permits shall be issued for the period beginning the first day of the month to the first day of the following month. Each permit shall be valid as authorized herein; it shall not be transferable.

- (1) Utility companies may be issued a permit for piling and pole trailers. Each permit may be valid for up to four designated trailers at the time of issue.
- (2) Utility companies and governmental agencies may be issued a permit for a manned and/or unmanned aerial type single motor vehicle up to 50 feet long. Each permit shall be valid for an individual vehicle only.
- (3) Pole, piling, and mill stock haulers may be issued a permit for pole, piling, and mill stock movements. Each permit shall be valid for an individual tractor only.
- (4) Ship permits may be issued for oversize and/or overweight vehicles engaged in ship offloading operations conducted at the Port of Wilmington to designated locations on designated state-maintained routes exclusive of Interstate routes within two (2) miles from the property limits of the Port of Wilmington.

Multi-trip permits shall not be issued for any purpose not specifically authorized in (1), (2), (3), or (4) of this section.

9. Permit Fees

- a. A permit for an oversize movement (not overweight) has a fixed issuance fee of \$10 which is chargeable to all classifications except as noted in 'b' below.
- b. The permit fee for the movement of a superload (a load that is 120 feet or more in length or 15 feet or more in width or 15 feet or more in height or over 120,000 pounds in weight) is \$30 plus any overweight fees noted in 'd' below. Mobile and modular homes that fall within the limits of a superload are treated as such and the fee is \$30.00.
- c. There is an additional fee of \$2 for any change to a validated permit.
- d. The fee for overweight movements shall be an additional \$5 per each 8,000 lbs. or fraction thereof over the licensed weight.
- e. The fee for multi-trip permits (except a ship permit) is \$30 per month. Multi-trip permits (except a ship permit) may be purchased in advance for periods of not more than 24 months. The fee for a ship permit is \$900 per ship and of five days duration.
- f. Payment on account may be made by check or money order payable to:

Delaware Department of Transportation

- g. Remittances may be submitted in person to any County Counter office noted in paragraph '5B' above or sent to the following mailing address:

**Hauling Permit Office
P. O. Box 7065
Dover, DE 19903-7065**

10. Extreme Emergency Permit

- a. The emergency must be of an extreme nature which can be confirmed by a police agency.
- b. The necessary equipment and/or the necessary routes cannot be determined during normal business hours.
- c. Procedure:
 - Contact the Dover Hauling Permit Office (302) 744-2700 during business hours.
 - Explain the nature of the emergency and the estimated number of moves required.
 - Emergency validation numbers will be issued.
 - The emergency number will permit the movement of loads and vehicles not exceeding 14 feet in width or 100,000 lbs. in weight on four axles, 108,000 lbs. on five axles or 120,000 lbs. on six or more axles. Since the Department will not be consulted in advance concerning the route, the Permittee by accepting the numbers, accepts all responsibility for any accidents, damage, or other claims of any type or nature whatsoever. The issuance of a emergency permit does not authorize the movement of the permitted vehicle over a weight-restricted bridge.
- d. Loads must be well marked for daylight hours and well lighted for nighttime moves in accordance with the 'Common Safety Standards' defined in Appendix B.
- e. Nonbusiness Hours Emergency Procedure:

Call the Transportation Management Center Phone Line (302) 659-2400. You will be put in contact with a Department official who can approve the emergency move.

11. Government No Charge Permits

The Department may issue no charge hauling permits to government agencies (Federal, State, County & Local) for the movement of their over dimensional and/or overweight equipment.

Additional information concerning the formulation of such an agreement can be obtained by contacting the Hauling Permit Office at (302)744-2700.

12. Superloads

A superload is defined as a vehicle and/or load fifteen (15) feet or more in width, fifteen (15) feet or more in height, one hundred twenty (120) feet or more in length, and/or has a gross weight in excess of 120,000 pounds. Examples of Superloads include house moves, overweight reactors, generators, cranes, etc. All applications for superload moves should be submitted at least five working days in advance of the requested movement date. Less notice may result in a delay of movement because of processing time. The Department will accept no liability or other claim due to processing delay or the refusal to permit the move at all.

a. Width Requirements:

If the load is so wide that passage by it cannot occur at least every fifteen minutes, the escort requirement will include sufficient Police Officers to provide diverting of traffic at reasonable points.

b. Height Requirements:

(1) 15 ft. and higher

Signal Supervisor approval:

New Castle County 323-4488

Kent and Sussex County 739-4366

(2) 17 ft. 6 in. and higher

Clearance from the appropriate utility company serving the intended route.

(3) 20' and higher

Superloads with a height of 20 feet or more must be scheduled so that not less than two (2) days remain in the workweek.

c. Length Requirements:

Prior to the issuance of a permit for a movement that is 120' or greater in length, permission for the movement must be obtained from the District Maintenance Engineer's for each district in which the proposed movement is to occur.

New Castle County 302-323-4485

Kent County 302-760-2417

Sussex County 302-856-5200

d. Weight Requirements:

Applications for permits for loads which exceed a gross weight of 120,000 pounds, or which involve a route across any structure which is posted with a load limit below the gross weight of the proposed movement, must be processed and approved by the Bridge Section of the Department of Transportation before being approved by the Permit Office.

e. General Requirements:

- An acknowledgement of notice to any incorporated area on the route will be required.

- Escort, sign, and flag requirements are outlined in Appendix B 'Common Safety Standards'.
- Delaware State Police are required to be notified 48 hours in advance.
- An acknowledgment of notice to the 911 office for the area will be required by contacting non-emergency numbers:
- No superload moves two weeks before a Holiday without special permission being obtained from Traffic Engineering and Management.

STATE OF DELAWARE PERMIT OVERSIZE/OVERWEIGHT NONDIVISIBLE LOADS

										PAGE OF					
APPLICANT					REQUESTED START DATE			OVERALL FEET INCHES*		OVERALL FEET INCHES*					
LOAD DESCRIPTION — MAKE, MODEL, SERIAL No., OR BILL OF LADING No.					LOAD CODE			LENGTH		HEIGHT					
					# OF PIECES			WIDTH		OVERHANG FEET INCHES* FRONT REAR					
MOTOR CARRIER'S NAME AND ADDRESS								USDOT / FEIN / SS#							
								VEHICLE		LIC. PLATE # IF NONE: VIN		ST/ JUR		# OF AXLES	
								POWER UNIT							
								TRAILER							
AXLE #	STEERING AXLE	2	3	4	5	6	7	GROSS WEIGHT							
AXLE WEIGHTS															
AXLE SPACINGS FEET/INCHES*															
SPECIFIC ADDRESS OF TRIP ORIGIN						SPECIFIC ADDRESS OF TRIP DESTINATION									
ROUTING INFORMATION										FEES					
										MIN:					
										WT:					
										TOLLS:					
										AMEND:					
TOLLS: MD LINE: BIDDLES: DOVER:										TOTAL:					
I(WE) HAVE READ THIS FORM AND HEREBY CERTIFY: THAT THE ABOVE DATA IS CORRECT TO THE BEST OF MY(OUR) KNOWLEDGE AND BELIEF, THAT THE LOAD IS NONDIVISIBLE, THAT SATISFACTORY ARRANGEMENTS HAVE BEEN MADE WITH THE PROPER AUTHORITIES TO TRAVEL ROADS AND CROSS OVER AND UNDER ALL STRUCTURES OPERATED BY AUTHORITIES NOT PARTY TO THIS PERMIT. APPENDIX B OF THE DELAWARE HAULING PERMIT MANUAL CONTAINS THE COMMON SAFETY STANDARDS THAT APPLY TO THIS MOVE. COPIES ARE AVAILABLE FROM THE PERMIT OFFICE OR THE APPLICANT'S REPRESENTATIVE.															
NAME OF APPLICANT'S REPRESENTATIVE					REP'S PHONE NUMBER			<div style="border: 1px solid black; height: 20px; margin-bottom: 5px;"></div> <div style="border: 1px solid black; height: 20px; margin-bottom: 5px;"></div> <div style="border: 1px solid black; height: 20px;"></div>							
DATE & TIME OF APPLICATION					REP'S FAX NUMBER										
EFFECTIVE DATE				ISSUE DATE											
EXPIRATION DATE				ISSUE TIME				PERMIT NUMBER							
SPECIAL PROVISIONS:															
THE SIGNED PERMIT MUST BE WITH THE VEHICLE DURING THE MOVE. AUTHORIZATION AND PERMISSION IS HEREBY GRANTED TO MOVE THE VEHICLE/LOAD ON THE ROUTING AS DESCRIBED ABOVE. THIS MOVEMENT SHALL ALSO BE MADE IN COMPLIANCE WITH DELAWARE LAW. THIS PERMIT MAY BE CONFISCATED AND/OR INVALIDATED IF ANY LAWS, RULES, REGULATIONS, OR PROVISIONS OF THE STATE OF DELAWARE ARE VIOLATED. ALL POSTED HIGHWAY/BRIDGE LIMITS MUST BE OBSERVED UNLESS SPECIFICALLY EXEMPTED HEREIN. THE ISSUANCE OF THIS PERMIT DOES NOT GUARANTEE THAT ANY HIGHWAY OR STRUCTURE IS CAPABLE OF CARRYING OR PASSING THE VEHICLE OR LOAD DESCRIBED.															

COMMON SAFETY STANDARDS

INTRODUCTION

The Delaware Department of Transportation has adopted the following common safety standards for use by permittees when in transit within Delaware. The safety standards have been adapted from the "Guide for Maximum Dimensions and Weights of Motor Vehicles and for the Operation of Non-divisible Load Oversize and Overweight Vehicles" prepared by the Subcommittee on Highway Transport and officially adopted by the American Association of State Highway and Transportation Officials (Revised November 1991). They have been further refined by the Northeast Association of State Transportation Officials (NASTO) Highway Transport Committee for use as a common set of standards for all movements throughout the region.

DAYS AND HOURS OF OPERATION

Permitted vehicles may move Monday through Friday, from sunrise to sunset, unless otherwise authorized or prohibited by this section or the permit.

In designated congested areas, the Department may prohibit permitted vehicles from moving during AM and/or PM commuter travel periods; and/or authorize permitted vehicles to move during designated times between sunset and sunrise, subject to special lighting requirements identified herein.

Due to the amount of highway traffic on holidays, vehicles and loads requiring oversize and/or overweight permits shall be prohibited from traveling on those days. Prohibited holidays include New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the day after Thanksgiving, and Christmas. Movement of such vehicles and loads may also be prohibited on any other days or hours when such movements may substantially affect the safety of the motoring public. Ship Permits are exempt from this prohibition.

Superloads and any other oversize and/or overweight moves that can not move at normal posted highway speeds (within 10 mph) are restricted from moves in Kent and/or Sussex County on Monday morning prior to 12 Noon and Friday afternoon after 12 Noon during the timeframe from May 15th to October 15th. This restriction applies to the following roads, US 9, US 13, US 113, SR 1, SR 18, SR 24, SR 26, SR 54, and SR 404.

INCLEMENT WEATHER

No movement shall be permitted when road conditions, weather conditions, or visibility make traveling hazardous to the operator or the driving public. If a permitted vehicle is underway when such conditions occur, the driver shall be required to proceed to a safe place off the roadway and park until conditions warrant safe travel.

SPEED LIMITS

Vehicles and loads requiring permits may travel at the posted maximum speed limits unless specifically prohibited by the permit.

ROUTING

The permit shall authorize movement only on the pavement portion of those highways specified in the permit. The permit does not authorize movement upon shoulders.

Vehicles and loads requiring permits should be routed around highway construction and maintenance projects and shall be routed around certain bridges or roadways in a way that creates the least hazard and inconvenience to both the mover and the public.

The permit is only for the route designated. The permit is only issued for movement on state maintained roadways (entire road network with the exception of some local city/town streets). Individual city's or town's rules/regulations may govern movement off the permitted route.

Every effort should be made to use the most suitable road network, which is closest to a straight line projected between the point of origin and final designation of the load.

ESCORTS

Escort vehicle(s) shall be a single unit non-permitted vehicle, no smaller than a compact car. The escort vehicle shall not be attached to any other vehicle.

Escort vehicle(s) shall escort only one oversize vehicle or load. More restrictive conditions may be required on high volume highways or when the lane width is less than twelve (12) feet.

One (1) escort vehicle is required for vehicles and loads more than twelve (12) feet in width but not exceeding fourteen (14) feet. The escort vehicle shall be behind an over width vehicle or load on a multi-lane highway, and in front of an over width vehicle or load on a two-lane highway.

Two (2) escort vehicles are required for vehicles and loads more than fourteen (14) feet in width. One (1) escort vehicle shall be in front of the over width vehicle or load and one (1) behind. A separate state police escort (third escort) is required for vehicles and loads more than fifteen (15) feet in width.

Vehicles and loads eighty-five (85) feet or more in overall length are required to have one (1) rear escort vehicle. Vehicles and loads one hundred (100) feet or more in overall length are required to have two (2) escorts, one (1) in front, and one (1) in the rear. Vehicles and loads one hundred twenty (120) or more in length are required to have a separate state police escort (third escort).

Two (2) escort vehicles are required for vehicles and loads fifteen (15) feet or more in height. One (1) escort vehicle shall be in front of the over height vehicle or load and one (1) behind. A separate state police escort (third escort) is required for vehicles and loads seventeen feet six inches (17' 6") or more in height.

Vehicles and loads with fifteen (15) feet or greater rear overhang shall have one (1) rear escort unless the permit specifies otherwise.

Two (2) escort vehicles, one (1) in front and one (1) behind the oversize vehicle are required when previous paragraphs separately require one (1) escort in the front and one (1) behind for multiple conditions.

Two (2) escort vehicles are required for vehicles and loads over 120,000 lbs.weight. One (1) escort vehicle shall be in front of the over weight vehicle or load and one (1) behind. A separate state police escort (third escort) is required.

A single Delaware State Police escort can escort up to a maximum of two loads in a single move if the loads are moved at the same time, other required escorts are available as stated above, and communication is present between the loads.

Vehicles and loads that are only overweight or are twelve (12) feet or less in width and that cannot move freely with the flow of traffic may be subject to escort requirements.

Escort Vehicles shall have visual contact with the permitted vehicle and have two-way radio communication with the driver of the permitted vehicle.

WARNING FLAGS

Required warning flags shall be in evidence during daylight hours. Red or orange fluorescent warning flags shall be at least eighteen (18) inches square. Flags shall be securely fastened to the vehicle or load by at least one corner of the flag or securely mounted on a staff.

Warning flags are required on vehicles and loads, which exceed legal width. These vehicles and loads are required to bear flags at the extremities of the vehicle or load as shown in Figure B-1.

Flags are also required on vehicles and loads which exceed legal length or which have a rear overhang in excess of four (4) feet. There shall be a single flag at the extreme rear if the over length or projecting portion is two (2) feet wide or less. Two (2) flags are required if the over length or projecting portion is wider than two (2) feet and shall be located to indicate maximum width. (See Figure B-2)

WARNING LIGHTS

General Lighting Requirements

Load hauling vehicles and escort vehicles shall travel with low beam headlights on at all times.

While not required in Delaware, load hauling vehicles may display a flashing 360 degree yellow (amber) light at an elevation above the highest point of the vehicle. A second flashing 360-degree light may be at the rear of the load if the load obstructs the visibility of the 360-degree light on the load-hauling vehicle. The 360-degree light shall be visible in all directions from a distance of 1,000 feet during daylight hours with a flash rate of 60 to 90 flashes per minute (FPM). The 360-degree light lens shall be at least 4 inches high whose minimum width or diameter at that height is 4 3/4 inches.

While not required in Delaware, warning lights for escort vehicles shall be located on the roof of the vehicle perpendicular to the length of the escort vehicle. The warning light bar shall be a minimum of 43 inches and a maximum of 52 inches long, a minimum of 10 inches and a maximum of 13 inches wide, and a minimum of 4 inches with a maximum of 8 inches high, consisting of flashing or strobe lights. Each warning light bar shall consist of a minimum of four lights. If flashing lights are used, they shall consist of at least two 95 and two 150 minimum FPM rotators; mirrors shall be placed diagonally between lights (mirrors to be reflective on both sides). All lights shall be visible on a 360-degree basis from the vehicle for a distance of 1,000 feet and arranged with at least two lights in each end of the bar light. The dome cover color shall be amber. The warning lights may be displayed while escorting the load in Delaware.

Whenever the rear running lights, stop lights, turn signals, or hazard-warning lights are obstructed by the load on a vehicle, lighting equipment shall be displayed on the rear of the load equivalent to the obstructed lights or signals.

Load Warning Lights

Warning lights shall be used for authorized night operations as shown in Figures B-3 and B-4.

For over width loads uniform in width, place amber lights on the forward corners of the load and red lights on the rear corners of the load as shown in Figure B-3.

If the load is over width for its entire length with a wider portion near the middle of the load, place red and amber lights at the rear and front corners of the load, respectively, with amber lights on the sides at the extreme limits of the load as shown in Figure B-3.

If the load is non-uniform in width, place red and amber lights at the rear and front corners, respectively of the over width portion as shown in Figure B-3.

For loads of legal width that are over length with a rear overhang exceeding four (4) feet, place four red lights on the rear and sides of the overhanging portion of the load. Amber lights are required at least every 6 feet on both sides of the overhang as shown in Figure B-4.

WARNING SIGNS

Warning signs shall be in evidence during all oversize movements. Load hauling vehicle warning signs shall be at least seven (7) feet long and eighteen (18) inches high. The sign's background shall be yellow with black lettering, and for night moves, of high-intensity reflective material. Letters shall be at least ten (10) inches high with a 1.41 inch brush stroke. Note: If Series E Modified is used, the brush stroke is to be two (2) inches.

Vehicles and loads exceeding legal width shall display two signs with the wording "OVERSIZE LOAD". One sign shall be on the front of the vehicle. The other shall be on the rear of the load; however, if the sign cannot be attached to, or is not legible on the load, then the sign shall be attached to the rear of the vehicle itself. Refer to Figure B-5.

Vehicle and loads exceeding legal length or rear overhang shall be required to display two signs with the wording "OVERSIZE LOAD". One sign shall be on the rear of the over length or overhanging part of the load; however, if the sign cannot be attached or is not legible here, then the sign shall be attached to the rear of the vehicle itself. The other sign shall be attached to the front of the vehicle. Refer to Figure B-6.

Escort vehicles shall display a sign on the roof or front and rear of the escort vehicle that is at least five (5) feet long and twelve (12) inches high with eight (8) inch high letters. For roof mounted signs, the sign shall be legible on both sides with the wording "OVERSIZE LOAD". The sign shall be mounted on the roof perpendicular to the length of the escort vehicle. For front and rear mounted signs the legend shall read "OVERSIZE LOAD".

Warning signs shall not obstruct lights and other safety devices on the vehicle with load or on the escort vehicle.

APPENDIX B

Delaware Common Safety Standards for Permit Move

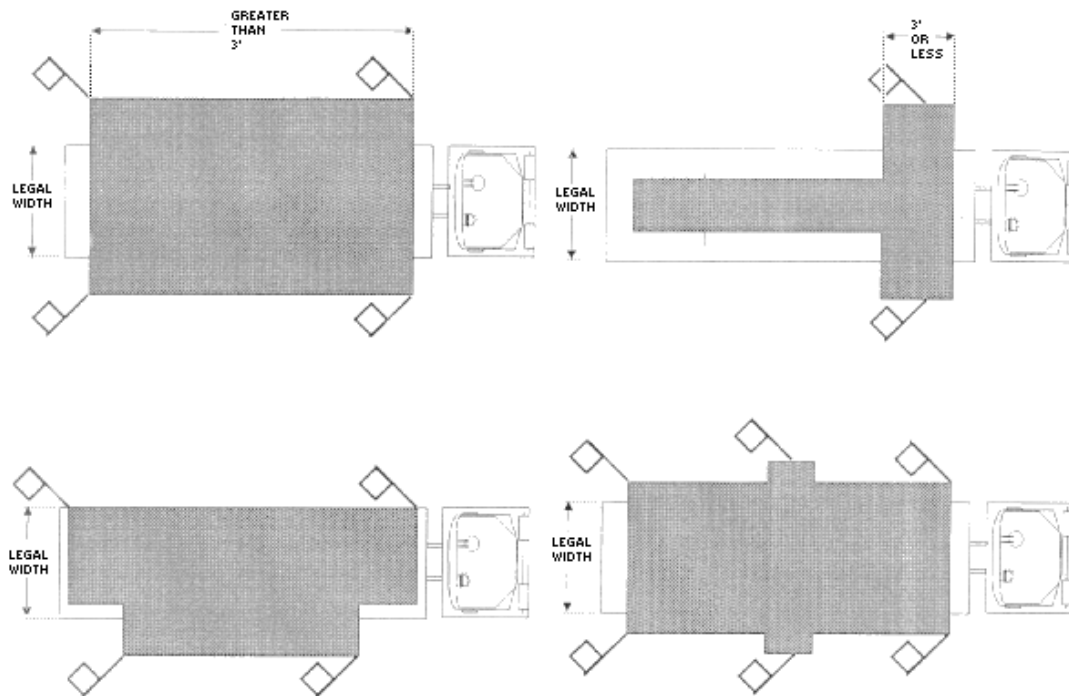


Figure B-1 Required Warning Flags on Overwidth Loads.

Note: Use of flags is not to increase the overall load width.

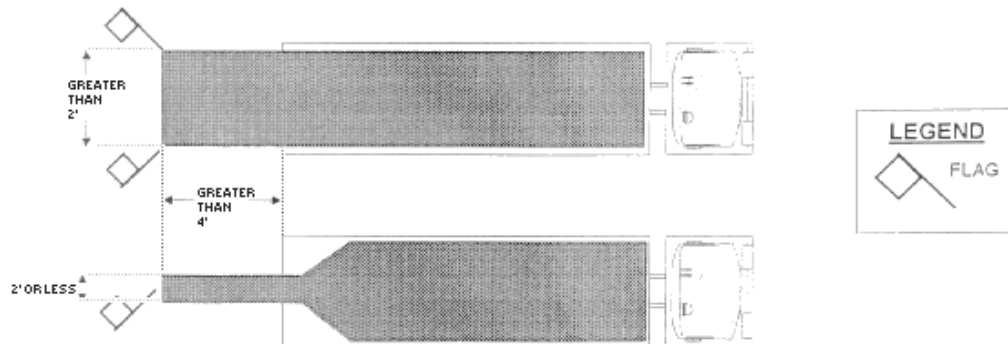


Figure B-1 Required Warning Flags on Overlength Load or Loads with a Rear End Overhang of more than four (4) feet.

Note: Use of flags is not to increase the overall load width.

PAGE 1
deHASR-T03.DS4

APPENDIX B

Delaware Common Safety Standards for Permit Move

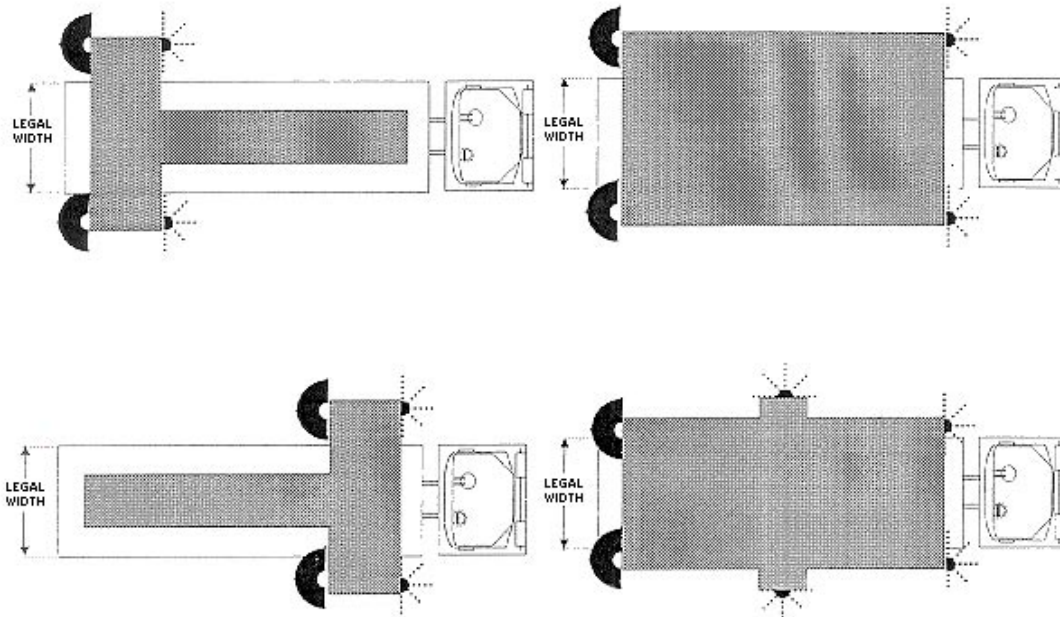


Figure B-3 Required Warning Lights on Overwidth Loads.

NOTE: Amber reflectors or amber lights are required at least every 6 feet along both sides of the overwidth portion of the vehicle or load.

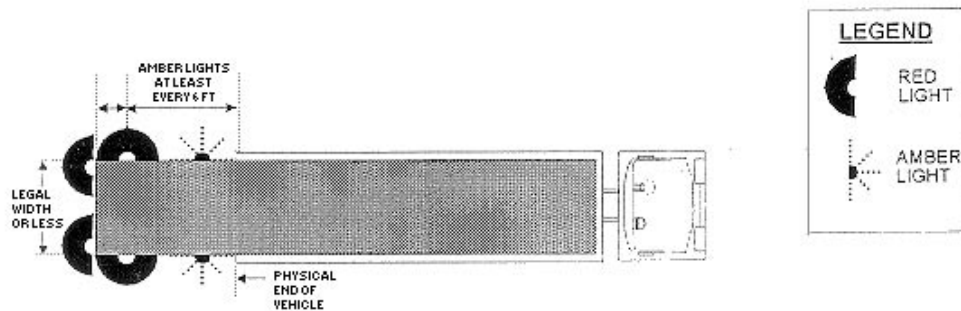


Figure B-4 Required Warning Lights on Overlength Load or Loads with a Rear End Overhang of more than four (4) feet.

PAGE 2
of NASH103.DS4

APPENDIX B
Common Safety Standards for Permit Move

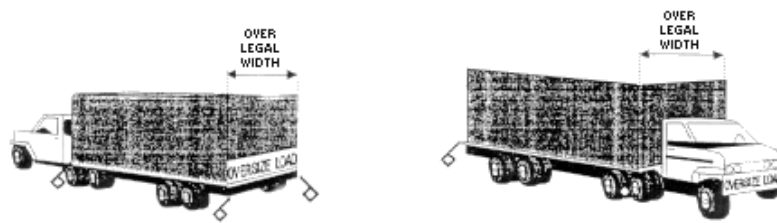


Figure B-5 Warning Signs on Vehicle or Load Over Legal Width

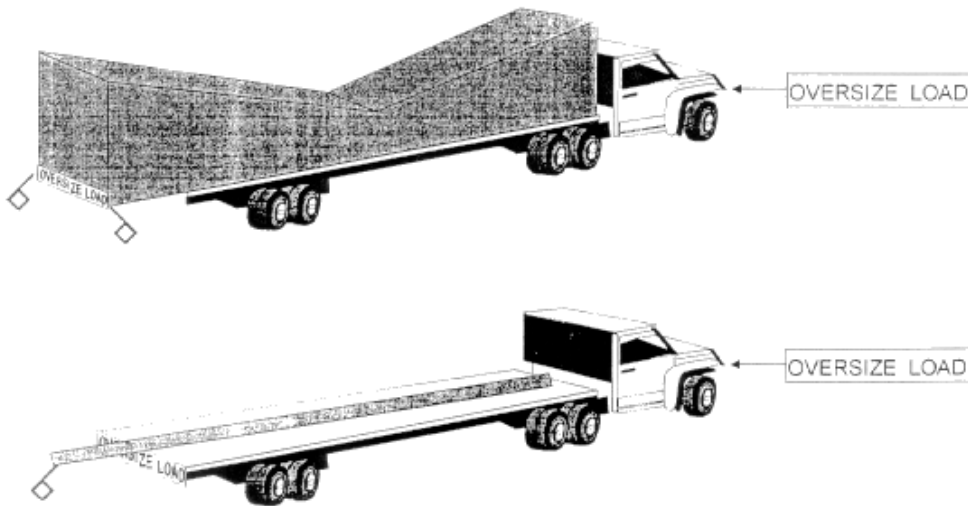


Figure B-5 Warning Signs on Loads Overlength or with Rear End Overhang

de NASHTON DSA

STATE OF DELAWARE ESCORT REQUIREMENTS

EFFECTIVE JANUARY 1, 2000

LENGTH:	at 85'	REAR		
	at 100'	REAR	FRONT	
	at 120'	REAR	FRONT	DSP
WIDTH:	over 12'	REAR on mult-lane, FRONT on two lane		
	over 14'	REAR	FRONT	
	over 15'	REAR	FRONT	DSP
HEIGHT:	at 15'	REAR	FRONT	
	at 17' 6"	REAR	FRONT	DSP
WEIGHT:	over 120K lbs	REAR	FRONT	DSP
OVERHANG	at 15'	REAR unless permit specifies otherwise		

SUPERLOAD

Length at 120'

Width at 15'

Height at 15'

Weight over 120,000 lbs